




PNEUMATIC COUPLINGS
PNEUMATISCHE KUPPLUNGEN

SERIE **065-066-067K**



Materials

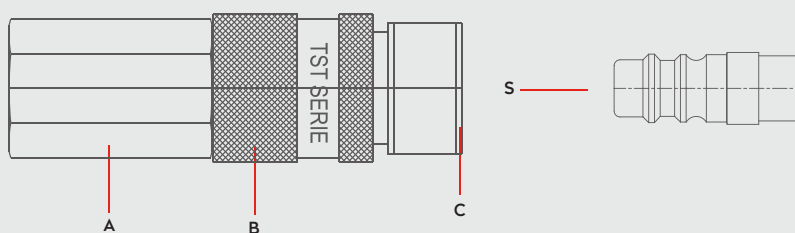

Material Code

A = Brass Nickel Plated

B = Steel Nickel Plated

C = Brass Nickel Plated

S = Brass




0 - 35 bar
(0-508 PSI)



-20° to +100°C (NBR)
-4° to +212°F

**Shut Off
Type**



OM 250 - 00500
OM 100 - 01000


FLOW

800 lt/min


DN

7.4 mm

Air

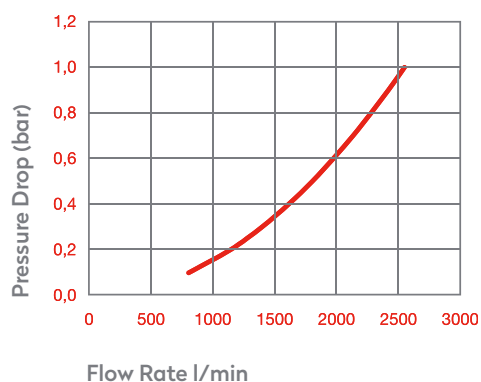


Water

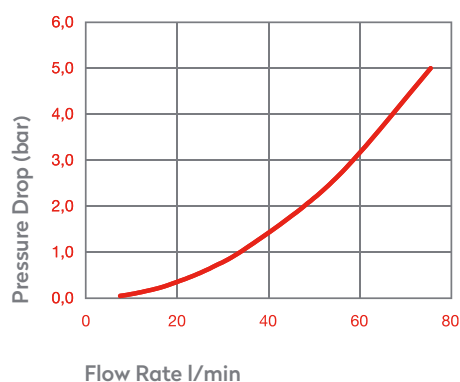

Options

FPM

Plug Profile Serie 065-066-067K

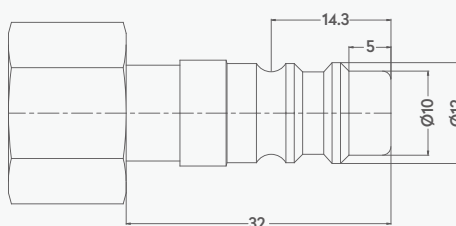


Compatible with


PARKER - RECTUS 65, 66, 67

SERIE 065-066-067K

QUICK COUPLINGS SCHNELLKUPPLUNGEN

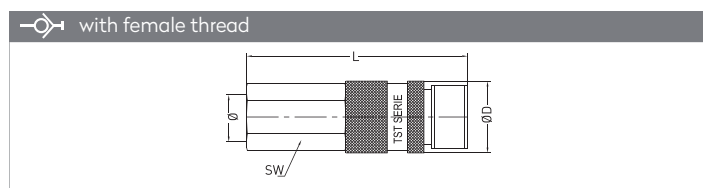


Connection	065K	066K	067K	SW	L	ØD
BSP 1/4"	065 DG 13	066 LDG 13	067 LDG 13	19	59,8	23
BSP 3/8"	065 DG 17	066 LDG 17	067 LDG 17	19	59,8	23

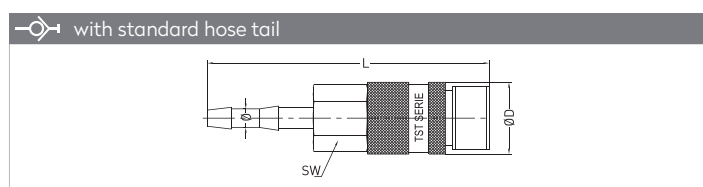


Connection	065K	066K	067K	SW	L	ØD
Ø 6 - Ø 1/4"	065 HG 06	066 HG 06	067 HG 06	19	81,3	23
Ø 9 - Ø 5/14"	065 HG 09	066 HG 09	067 HG 09	19	81,3	23

PLUGS STECKNIPPEL

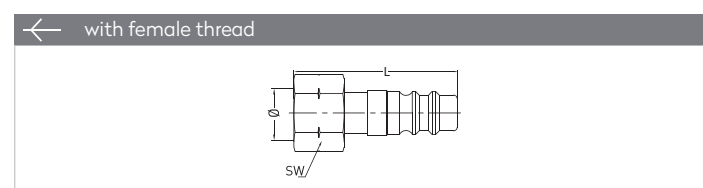

Connection	065K	066K	067K	SW	L
BSP 1/4"	065 DU 13	066 LDU 13	067 LDU 13	17	46
BSP 3/8"	065 DU 17	066 LDU 17	-	19	46

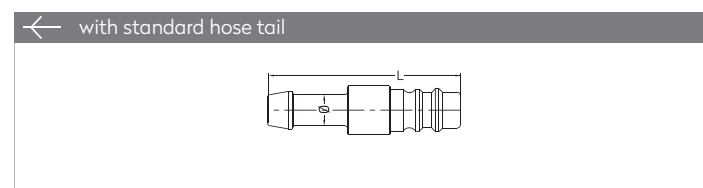

Connection	065K	066K	067K	L
Ø 6 - Ø 1/4"	065 HU 06	066 HU 06	067 HU 06	55
Ø 9 - Ø 5/14"	065 HU 09	066 HU 09	067 HU 09	60