




PNEUMATIC COUPLINGS
PNEUMATISCHE KUPPLUNGEN

SERIE 068

DN 8.5



Materials

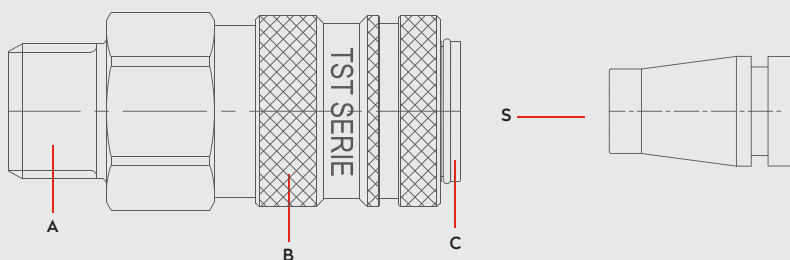

Material Code

A = Brass Nickel Plated

B = Steel Nickel Plated

C = Steel Nickel Plated

S = Steel Nickel Plated




0 - 35 bar
(0-508 PSI)



-20° to + 100°C (NBR)
-4° to + 212°F

Shut Off
Type



OM 353 - 01295
OM 262 - 00920
OM 157 - 01700


FLOW

2000 lt/min


DN

8.5 mm

Air 6 Bar

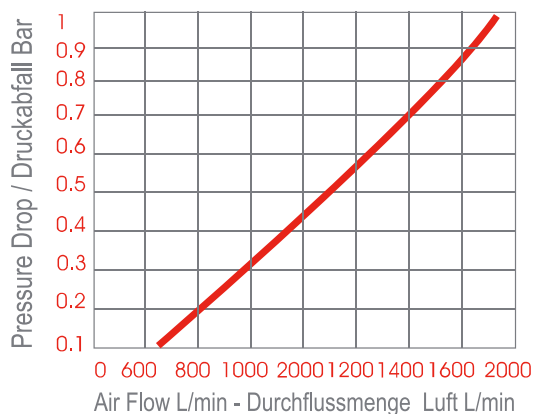


Water

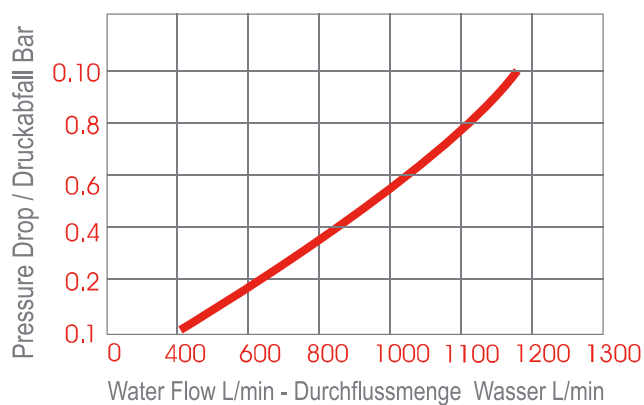

Options


Plug Profile Serie 068

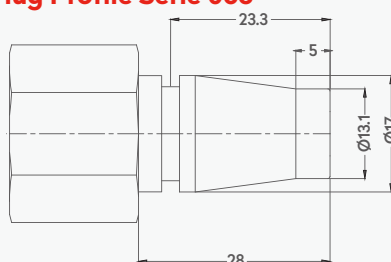


Compatible with

PARKER - RECTUS 68
SCHRADER HEAVY DUTY


QUICK COUPLINGS SCHNELLKUPPLUNGEN

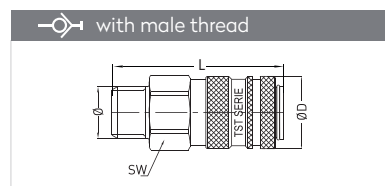

Connection	Part No.	SW	L	ØD
BSP 3/8"	068 EG 17	27	65,7	30
BSP 1/2"	068 EG 21	27	67,7	30
BSP 3/4"	068 EG 26	30	71,7	30

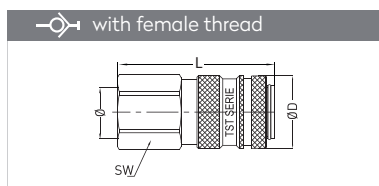


Connection	Part No.	SW	L	ØD
BSP 1/4"	068 DG 13	27	66,7	30
BSP 3/8"	068 DG 17	27	67,7	30
BSP 1/2"	068 DG 21	27	69,7	30
BSP 3/4"	068 DG 26	32	73,7	30

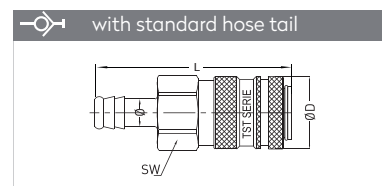


Connection	Part No.	SW	L	ØD
10 mm - 3/8"	068 HG 10	27	80,7	30
13 mm - 1/2"	068 HG 13	27	80,7	30
19 mm - 3/4"	068 HG 19	27	80,7	30


PLUGS STECKNIPPEL

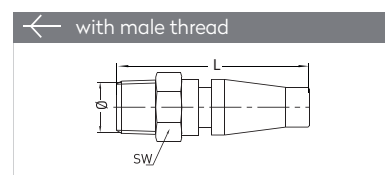

Connection	Part No.	SW	L
BSPT 1/4"	068 RU 13	19	49
BSPT 3/8"	068 RU 17	19	50
BSPT 1/2"	068 RU 21	22	52
BSPT 3/4"	068 RU 26	27	53

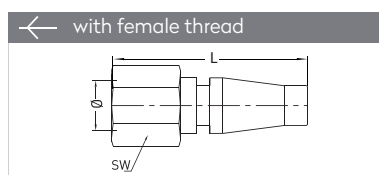

Connection	Part No.	SW	L
BSP 1/4"	068 DU 13	19	40
BSP 3/8"	068 DU 17	21	43

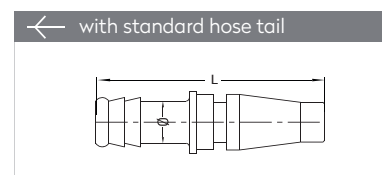

Connection	Part No.	L
10 mm - 3/8"	068 HU 10	70
13 mm - 1/2"	068 HU 13	70